

M150

World's Smallest Stringpot

Ultra Miniature String Pot • Voltage Divider Output

1 1/2-inch Stroke Range

Precision High-Cycle Potentiometer

Designed for Test and Space-Critical Applications



GENERAL


Full Stroke Range	0-1.5 inches
Output Signal Options	voltage divider (potentiometer)
Accuracy	± 1% full stroke
Resolution	essentially infinite
Sensitivity	897 – 924 mV/V full stroke
Measuring Cable	.014-inch dia. nylon-coated stainless steel
Measuring Cable Tension	4 oz. ±25%
Maximum Measuring Cable Acceleration	39 g
Enclosure Material	anodized aluminum
Sensor	conductive plastic precision potentiometer
Potentiometer Cycle Life	5 million cycles
Weight	0.5 oz. max.

ELECTRICAL

Input Resistance	5K ±10% ohms
Recommended Output Signal Current	< 1µA
Recommended Maximum Input Voltage	20 VDC

ENVIRONMENTAL


Enclosure	NEMA 12, IP 50
Operating Temperature	-40° to 185°F (-40° to 85°C)
Temp. Coefficient of Sensing Element	.0028%/°F (.005%/°C)
Vibration	up to 10 g at 30 – 2000 Hz max.

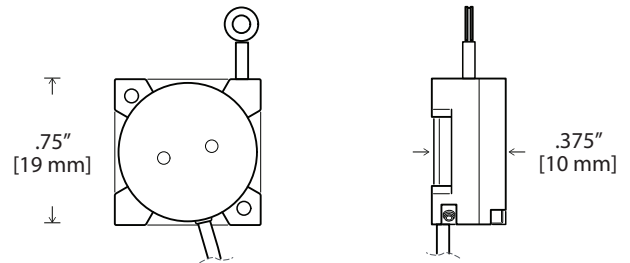


Introducing the world's smallest stringpot. The M150 is smaller than a thumbprint and occupies a tiny space of only .74 x .74 x .38 inches. With a full stroke measurement range of 1.5 inches, the M150 has been designed for many aerospace and automotive space-critical test applications such as throttle position and crash-test instrumentation.

The heart of the M150 is a precision high-cycle conductive plastic potentiometer that delivers a high-linearity voltage position feedback signal. With its rugged all aluminum construction, the M150 has been engineered for reliability and to provide quick, easy and hassle-free installation.

Output Signal

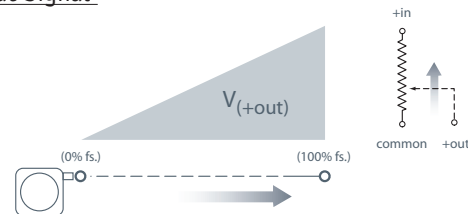

Electrical Connection




20630 Plummer Street • Chatsworth, CA 91311
tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799



www.sensorway.cn • sales@sensorway.cn



Outline Drawing:

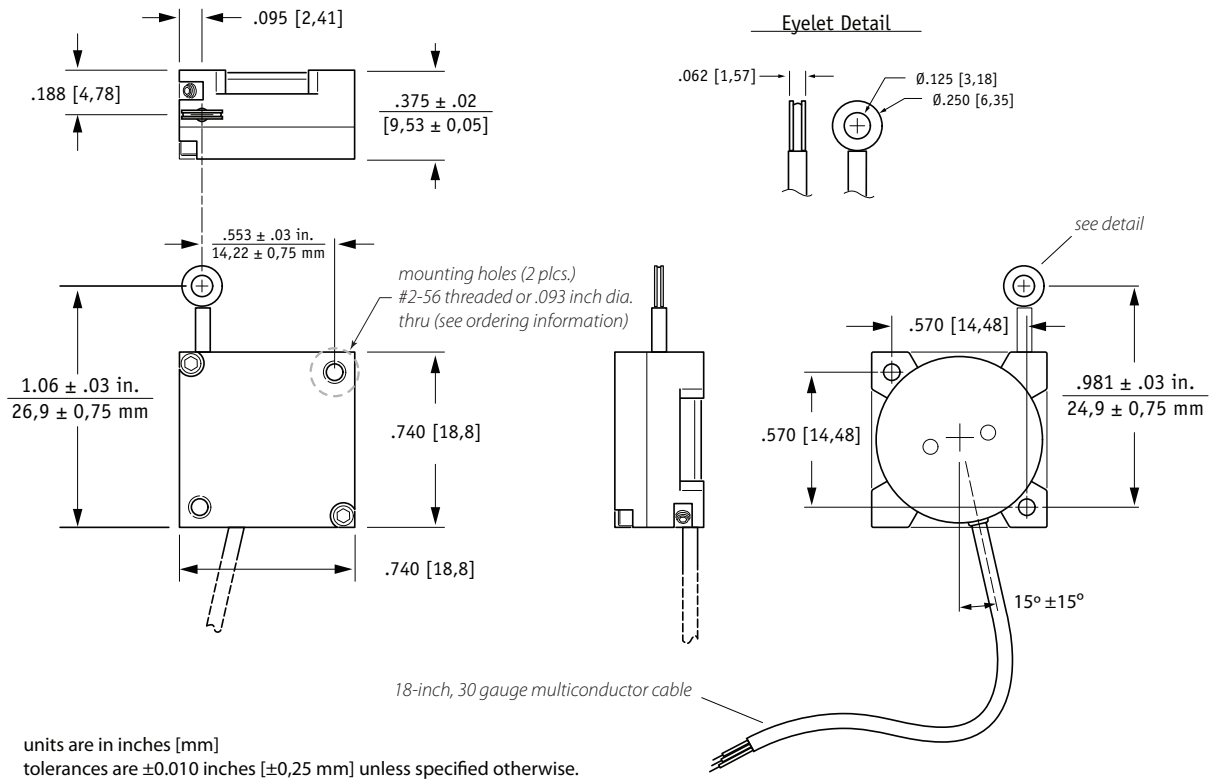

Ordering Information

Model Number:

M150 - 4 - A - B - 5K - C1
order code:

Sample Model Number:

M150 - 4 - H1 - E - 5K - C1

- A** mounting hole style: .093 inch dia. thru
- B** measuring cable termination: eyelet

Mounting Hole Style:




A *order code:*

H1

.093 thru

H2*


threaded



*-includes: 4) #2-56 x 3/8" pan head mounting screws with washers

Measuring Cable Termination:

Ⓑ order code:

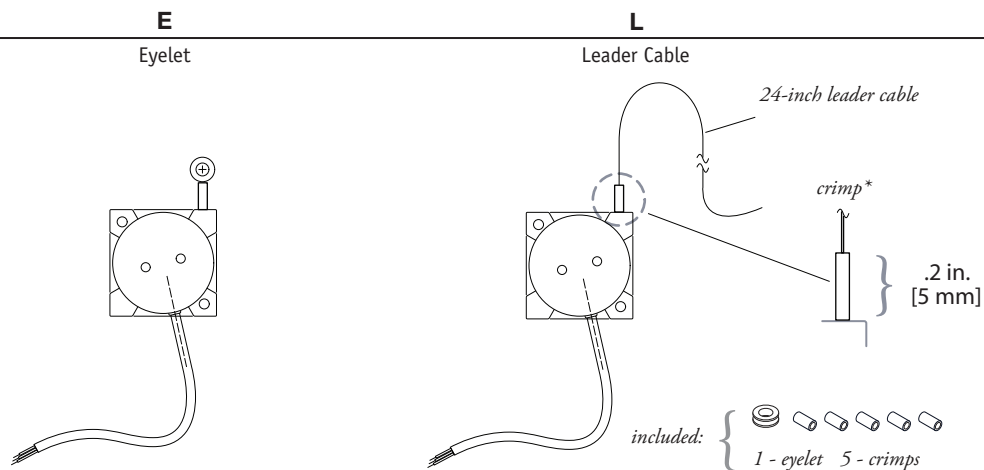

*note: crimped stop prevents leader cable from retracting into sensor body

北京赛斯维测控技术有限公司
北京市朝阳区望京西路48号
金隅国际C座1002
电话：+86 010 8477 5646
传真：+86 010 5894 9029
邮箱：sales@sensorway.cn
<http://www.sensorway.cn>